



# E.B.Models Slotted Signals Instruction Diagrams 2 - NOT TO SCALE

## Construction of Brackets


Off-hand single doll large bracket

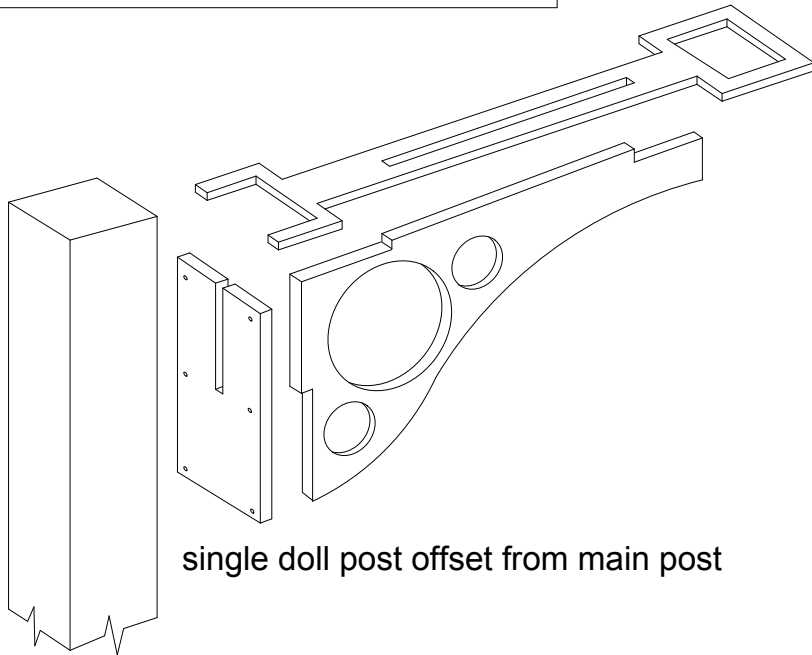

Balance weight return lever and frame (ground signals)

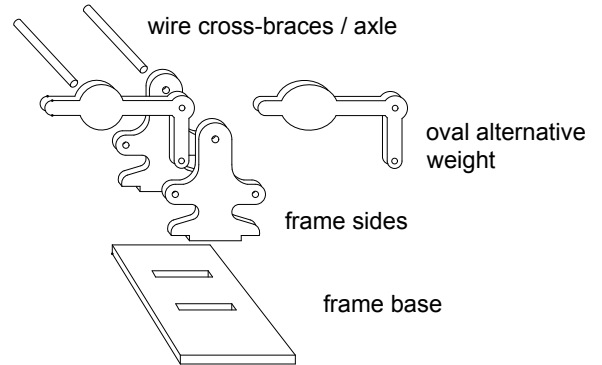


Equal 2 doll bracket


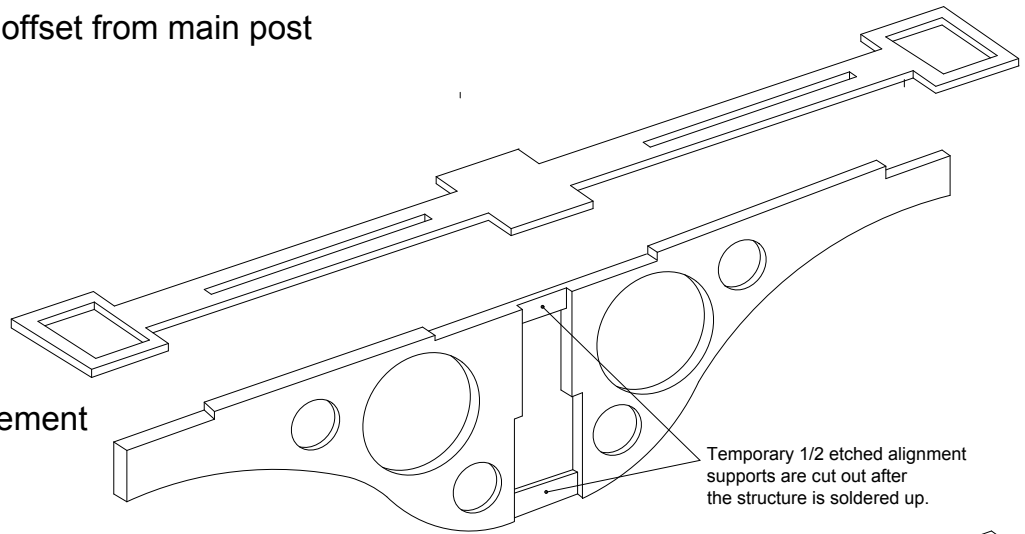


Repeat the same arrangement both sides

Temporary 1/2 etched alignment supports are cut out after the structure is soldered up.

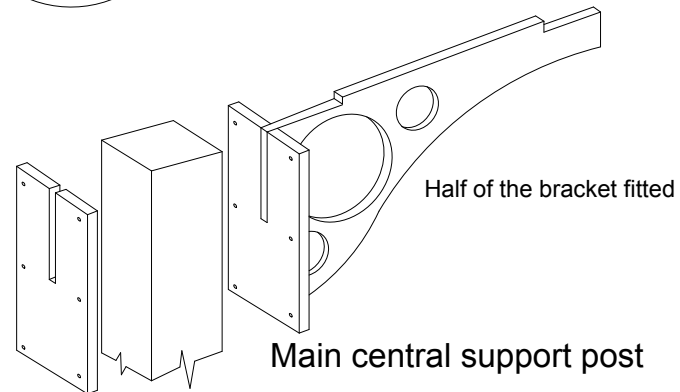

gap - to allow cross-braces to fix to catwalk and attach to posts

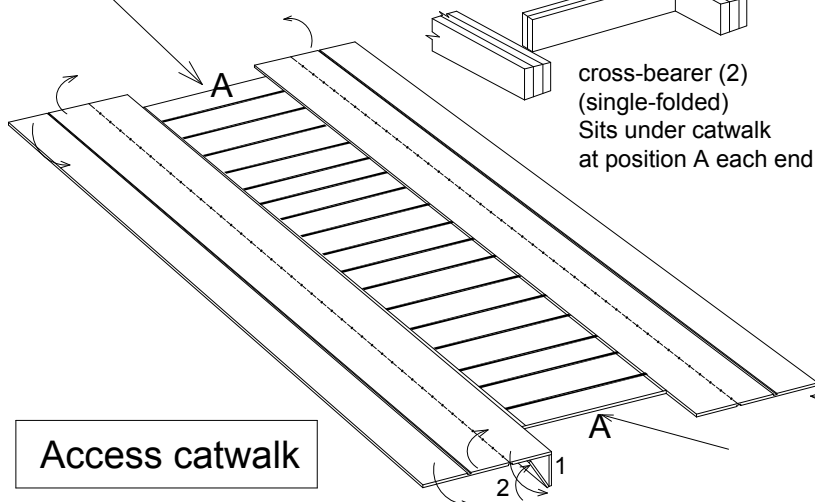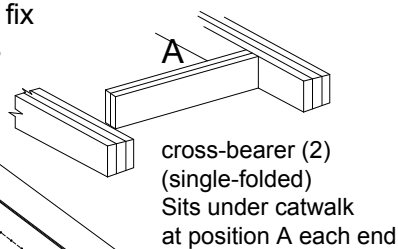

- bend outer section under
- bend centre section upwards
- bend inner section down

gap - some frets do not have this gap. Simply remedied by removing one slat each end

